

# UEL PRIMARY SCHOOL



## Project Facts

**Sector:** Education

**Our Role:** Sub Contractor

**Location:** Dagenham, Essex

**Client:** Neilcott Construction Ltd

**Project Value:** £1m

**Duration:** 28 weeks

## Overview:

Natta were contracted to undertake all groundworks on this new build primary school building in Dagenham. This comprised of two site visits, with the initial visit in particular being undertaken against an extremely tight program which Natta met.

### Scope of Works:

Natta successfully completed the drainage, foundations and floor slabs to the new school building and all external finishing works to the large permeable car parks and play areas.

Works included the installation of a piling mat of 3700m<sup>2</sup> to enable the installation of vibro piling support to the building substructure. Bulk muck shift and excavations comprising 3100m<sup>3</sup> of excavation, 1100m<sup>3</sup> of fill and 2050m<sup>3</sup> of muck away off of site were also undertaken. The scheme also included the construction of a raft foundation for the new school building which comprised 600m<sup>3</sup> of concrete and 2500m<sup>2</sup> of slab constructed.

All internal and external drainage, of which, foul water was 600m and stormwater 980m were completed. This included the construction of a 385m<sup>2</sup> cellular stormwater attenuation tank.

The external finishing works were to a high specification and included all formation works and finishings to the following: 4600m<sup>2</sup> of permeable tarmac car parks, tarmac play areas and block paved footpaths, 1600m<sup>2</sup> of slabs laid along with 250m<sup>2</sup> of resin bound play areas. The main teachers car park comprising 720m<sup>2</sup> was constructed using permeable gravel construction.



## PROJECT ACHIEVEMENTS


*VERY FAST CONSTRUCTION, A HIGH STANDARD OF FINISHING - LOOKS GREAT*

**ANDY FOWLER OPERATIONS DIRECTOR NATTA**

## Summary:

Natta worked with Neilcott to effect value engineering savings of 20% off the tendered sum. These included a redesign of the Storm drainage attenuation, recycled in lieu of naturally mined aggregates and landscaping to retain arisings on site.

As on all Natta projects, recycled glass was used in lieu of sharp sand under all slabbing and block paving. Muck away was reduced by engineering and landscaping a series of earth bunds. The value engineering also delivered extra BREEAM points. The contract programme required the delivery of the complete school in seven months. This was achieved early which was a testament to all involved.

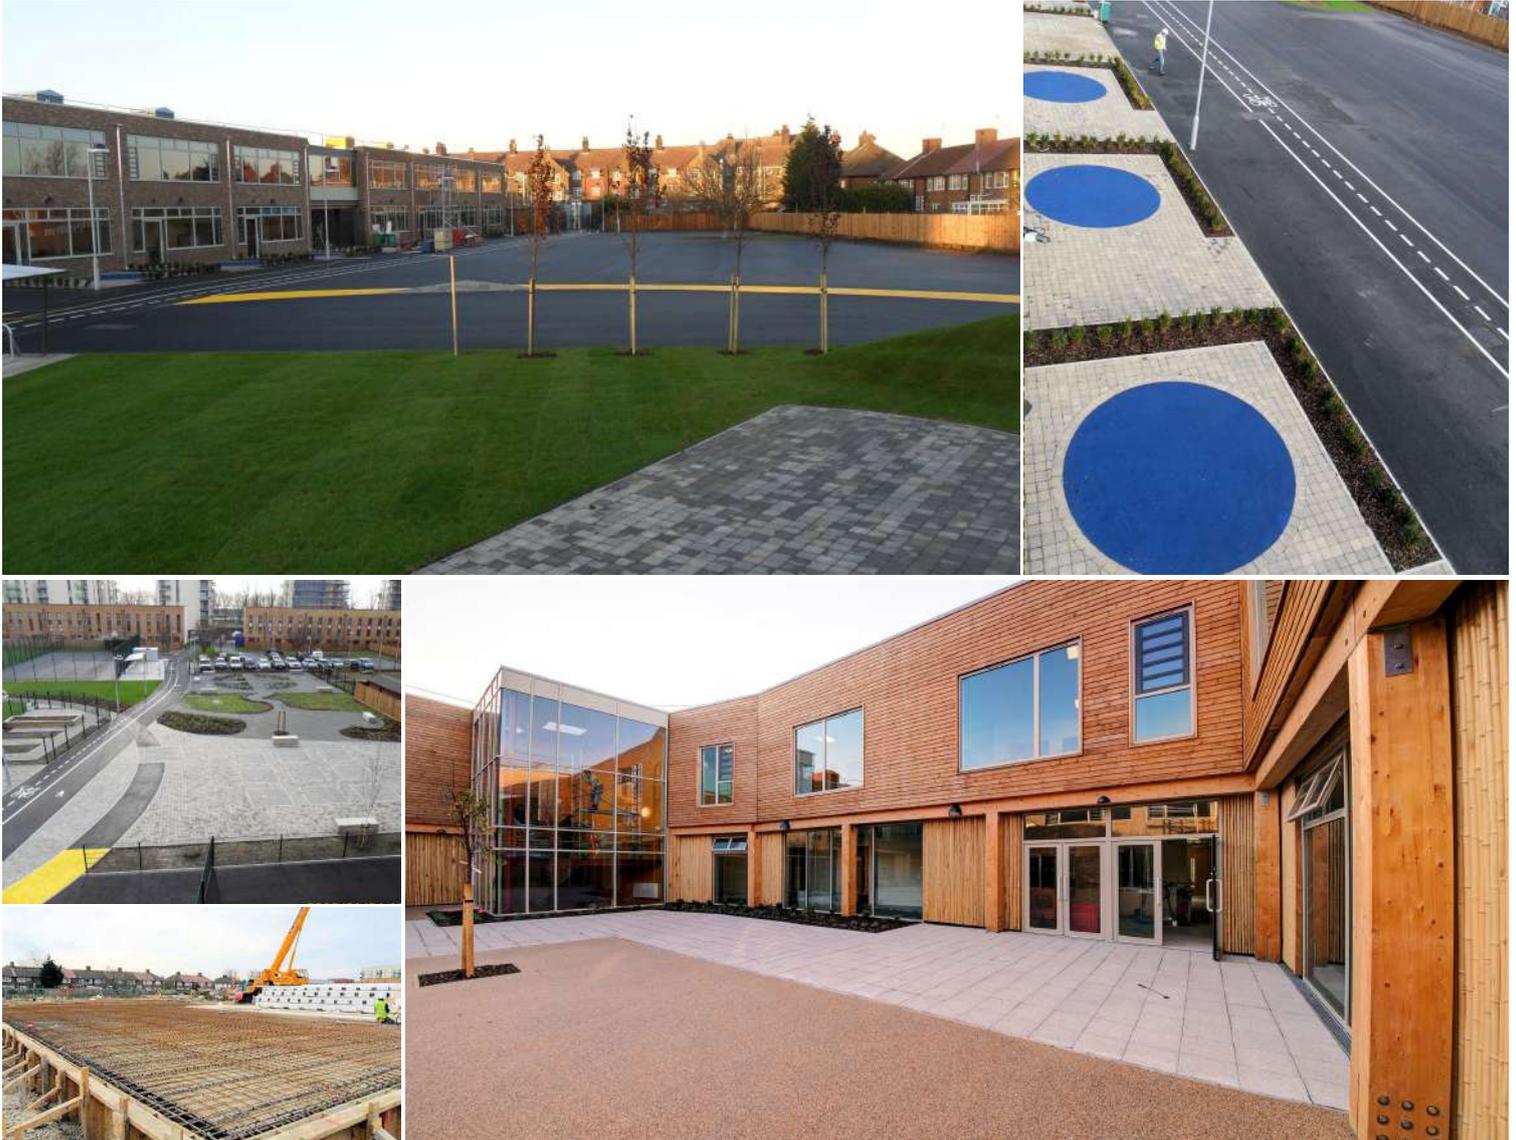

***NATTA HAVE BEEN COOPERATIVE AND RELIABLE THROUGHOUT THE PROJECT AND HAVE PROVIDED THE ADDITIONAL PLANT AND LABOUR RESOURCES AS NECESSARY TO MEET ALL TIMEFRAMES SET BY US. I WOULD BE HAPPY TO RECOMMEND THEM FOR FUTURE WORKS.***

***PAUL WRIGHT SENIOR CONTRACTS MANAGER NEILCOTT CONSTRUCTION***